

# BizLink

## TYPE 340 South Africa

### Plug for safety class I + II

2-pole plug with/without earthing-contact


SANS 164-1

16 A, 250 V~

pins provided with insulating sleeves, nickel-plated



### Technical drawing

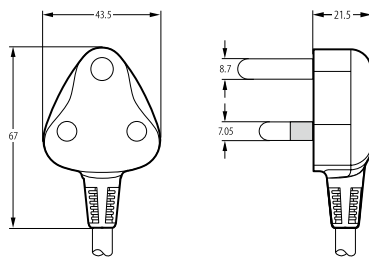

### Approvals

### Suitable flexible cord types

<b>H03VVH2-F</b>	2 x 0.75	<b>H05VVH2-F</b>	2 x 0.75
<b>H05VVH2-F</b>	2 x 1	<b>H05VV-F</b>	2 x 0.75
<b>H05VV-F</b>	2 x 1	<b>H05RN-F</b>	2 x 0.75
<b>H05RN-F</b>	2 x 1	<b>H05RR-F</b>	2 x 0.75
<b>H05RR-F</b>	2 x 1	<b>H03VV-F</b>	3 G 0.75
<b>H03RT-H</b>	3 G 0.75	<b>H03RT-H</b>	3 G 1
<b>H05VV-F</b>	3 G 0.75	<b>H05VV-F</b>	3 G 1
<b>H05VV-F</b>	3 G 1.5	<b>H05RN-F</b>	3 G 0.75
<b>H05RN-F</b>	3 G 1	<b>H05RR-F</b>	3 G 0.75
<b>H05RR-F</b>	3 G 1	<b>H05BQ-F</b>	3 G 1