

TYPE LAP-23 D

Plug for safety class I

2-pole plug with earthing-contact


AS/NZS 3112

7.5 A/10 A, 250 V~

pins provided with insulating sleeves, nickel-plated



Technical drawing

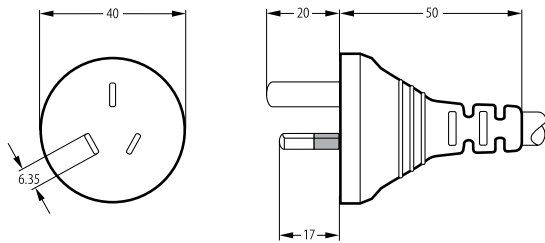

Approvals



Suitable flexible cord types

H05VV-F	3 G 1.5	H05V2V2-F	3 G 1.5
H05BQ-F	3 G 1	07VV-F	2 x 0.75
07VV-F	2 x 1	07VV-F	3 G 0.75
H07VV-F	2 x 0.75	H07VV-F	2 x 1
H07VV-F	3 G 0.75	H07VV-F	3 G 1
H07RN-F	2 x 1	H07RN-F	2 x 1.5
H07RN-F	3 G 1	H03VV-F	3 G 0.75
H05VV-F	2 x 0.75	H05VV-F	2 x 1
H05VVH2-F	2 x 0.75	H05VV-F	3 G 0.75
H05VV-F	3 G 1	H05RN-F	3 G 0.75
H05RN-F	3 G 1	H05RR-F	3 G 0.75
H05RR-F	3 G 1		