



Waterproof



Dustproof



AC Mode




Wide Range
Temperature

- Designed for AC charging mode options for convenient charging of Electric Vehicles (EV) and Electric Vehicles Supply Equipment (EVSE)
- Charge coupler compliant with SAE J1772, IEC 62196-2, and GB 20234.2
- Ergonomic design and impact resistant
- Mechanical lifespan, over 10,000 mating cycles
- Custom cable lengths available




Connector Dimensions


SAE J1772 Compliant

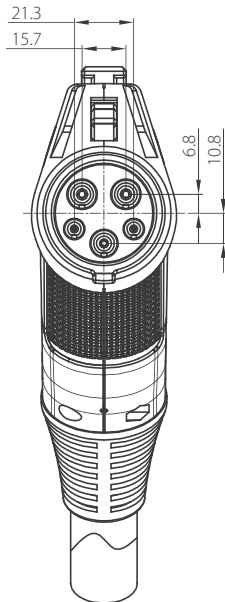

GB 20234.2 Compliant

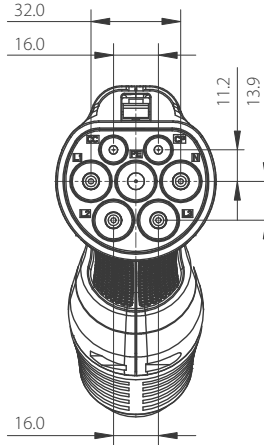

IEC 62196-2 Compliant

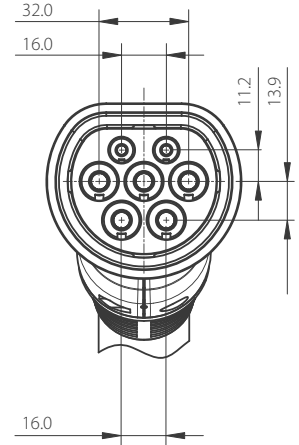

Specifications

	SAE J1772 Compliant	GB 20234.2 Compliant		IEC 62196-2 Compliant
Nominal Supply Voltage	120VAC/240VAC	250VAC (1-phase)	440VAC (3-phase)	240VAC/415VAC
Maximum Continuous Current	Max. 30A/50A	Max. 10A/16A/32A	Max. 16A/32A/63A	Max. 16A/32A/63A
AC Plug Type	NEMA 14-50, NEMA 6-20, CEE 7/7, Type G			



Headquarters

BizLink Technology, Inc.
 47211 Bayside Parkway, Fremont, CA 94538, USA
 Phone +1 510 252 0786 sales@bizlinktech.com

Global Sales Contacts

USA sales@bizlinktech.com
Europe sales_europe@bizlinktech.com
China sales_gc@bizlinktech.com
India sales_india@bizlinktech.com

Japan sales_japan@bizlinktech.com
Malaysia sales_malaysia@bizlinktech.com
Taiwan sales_tw@bizlinktech.com