

Branch Cable**DC Branch Fuse Holder 1500V/1000V**

1 to 2



1 to 3



2 to 3



3 to 3



- Consist of assembled, hermetically-sealed branch connection with choices of pre-assembled connectors terminating each PV cable ends
- Eliminate the need for in-field stripping and crimping and the associated high impedance from bad crimps



Branch Cable


DC Branch Fuse Holder 1500V/1000V

SUNBOLTS

Photovoltaic Connection


Dimensions

Customization Service

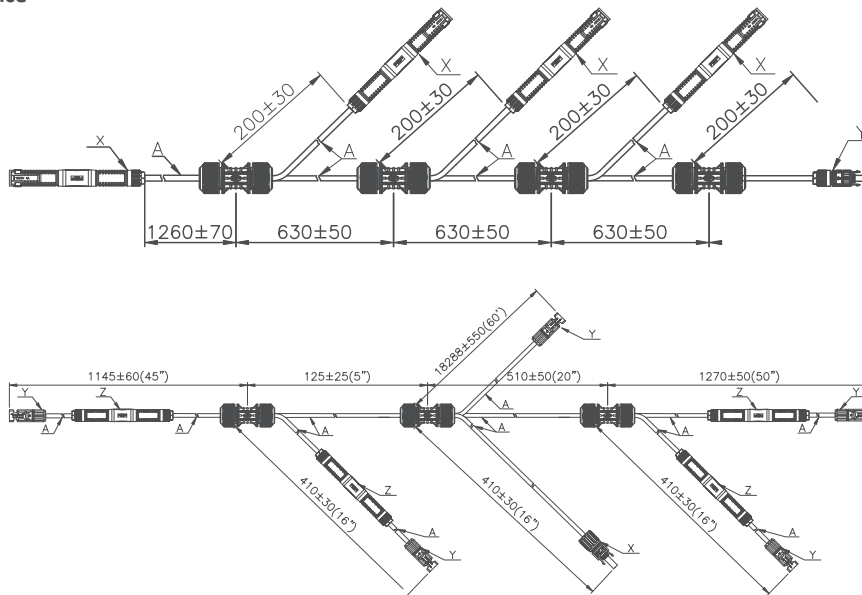

Unit: mm

Configuration Info

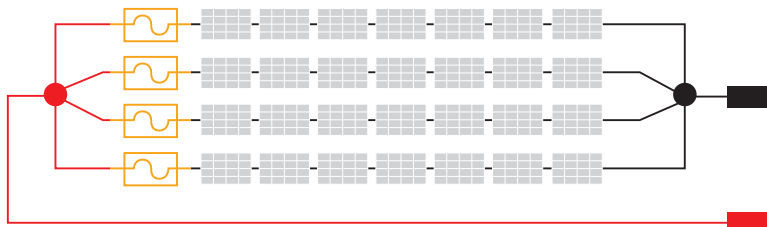

- Parallel multiple strings in one output
- Require shorter cable length with lower resistance
- Increase power efficiency in field

Specifications

Rated Voltage	1500V/1000V
Rated Current	Connector-TÜV 70A/UL 65A/Fuse Holder-15A @+75C/20A @+50C
Protection Degree	IP67
Operation Temperature	-40°C ~ +75°C
Cable Size	2.5/4/6/10 mm ² or 6/8/10/12/14AWG
Connector Option	BizLink S418, MC4, MC4-EVO2, H4, UTX
Fuse Specification	1500V, 15A @+75C/20A @+50C, 10mm x 85mm/1000V, 15A @+75C/20A @+50C, 10mm x 38mm



BizLink

www.bizlinktech.com

Headquarters

BizLink Technology, Inc.
47211 Bayside Parkway, Fremont, CA 94538, USA
Phone +1 510 252 0786 sales@bizlinktech.com

Global Sales Contacts

USA sales@bizlinktech.com
Europe sales@bizlinktech.com
China sales_gc@bizlinktech.com
India sales_india@bizlinktech.com

Japan sales_japan@bizlinktech.com
Malaysia sales_malaysia@bizlinktech.com
Taiwan sales_tw@bizlinktech.com

© 2021 BizLink Group. All rights reserved.
BizLink, Sunbolts, and other trademarks are the trademarks of BizLink Group or its subsidiaries.
Specifications are subject to change without prior notice. January 2021