

# BizLink

## TYPE 415C

### Plug for safety class I

3- or 4-pole plug with earthing-contact


Perilex – DIN 49446-3

16 A, 400/230 V~

Round and rectangular mass metal pin



### Technical drawing

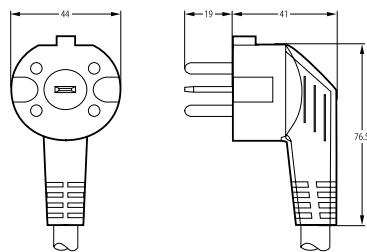

### Approvals



### Suitable flexible cord types

H05VV-F	5 G 1.5	H05VV-F	5 G 2.5
H05VV-F	4 G 1.5	H05VV-F	4 G 2.5
H05V2V2-F	5 G 1.5	H05V2V2-F	5 G 2.5
H05V2V2-F	4 G 1.5	H05V2V2-F	4 G 2.5