

TYPE 385

Plug for safety class I

2-pole plug with earthing-contact


SI 32 Part 1.1

16 A, 250 V~

solid metal pins, nickel-plated



Technical drawing

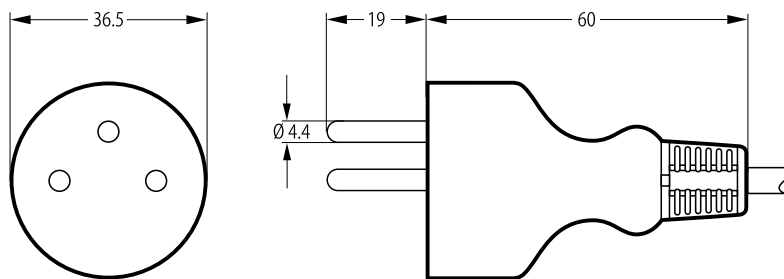

Approvals

Suitable flexible cord types

H03VV-F	3 G 0.75	H03RT-H	3 G 0.75
H03RT-H	3 G 1	H05VV-F	3 G 0.75
H05VV-F	3 G 1	H05VV-F	3 G 1.5
H05V2V2-F	3 G 0.75	H05V2V2-F	3 G 1
H05V2V2-F	3 G 1.5		