

**Inline Fuse****S417 Fuse Cable / Fuse Holder UL 1500V**

- Over current protection for module strings
- Support the PV fuse rating 2-32A with UL listed
- IP67 or IP68 waterproof and dustproof protection
- Max 75°C operation temperature to withstand extreme climate
- Optional connection by connector or cable
- In-line fuse design with assembly type or overmold type
- UL E351893




## Inline Fuse

### S417 Fuse Cable / Fuse Holder UL 1500V


**SUNBOLTS**

Photovoltaic Connection

## Dimensions

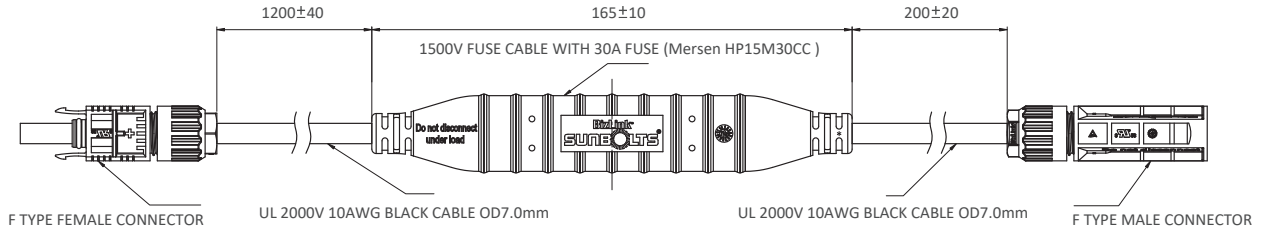

Fuse Cable

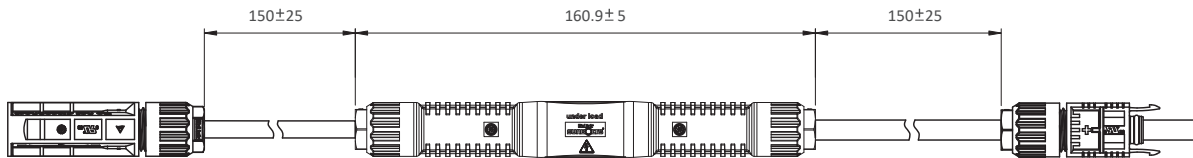

Fuse Holder

Unit: mm

## Specifications

	Fuse Cable / S417-Axxxx	Fuse Holder / S417-0xxxx
Rated Voltage	1500Vdc	1500Vdc
Certified Current	32A	30A
Rated Current	32A @ 75°C	15A @ 75°C, 20A @ 50°C
Housing Protection	Overmold	Assembly
Degree of Protection	IP68 (1m, 1hr)	IP67
Flammability Class	UL94 V-0	UL94 V-0
Wire Size	12-8AWG	14-10AWG
Fuse Optional	1500V, 2-32A, Crimped cable	1500V, 2-20A, Assembled
Fuse Dimension	11.5mm x 112mm	10mm x 85mm
Compatible Fuse Brand	Littelfuse / Mersen	Littelfuse / Mersen / Bussmann



**BizLink**

### Headquarters

BizLink Technology, Inc.  
47211 Bayside Parkway, Fremont, CA 94538, USA  
Phone +1 510 252 0786 sales@bizlinktech.com

### Global Sales Contacts

**USA** sales@bizlinktech.com  
**Europe** sales@bizlinktech.com  
**China** sales\_gc@bizlinktech.com  
**India** sales\_india@bizlinktech.com

**Japan** sales\_japan@bizlinktech.com  
**Malaysia** sales\_malaysia@bizlinktech.com  
**Taiwan** sales\_tw@bizlinktech.com

www.bizlinktech.com

© 2021 BizLink Group. All rights reserved.  
BizLink, Sunbolts, and other trademarks are the trademarks of BizLink Group or its subsidiaries.  
Specifications are subject to change without prior notice. January 2021