

BizLink

TYPE 377

Plug for safety class I


2-pole flat plug with earthing-contact (acc. to the new standard SANS 164-2:2012)

SANS 164-2:2012 Edition 3.1

16 A, 250 V~



Technical drawing

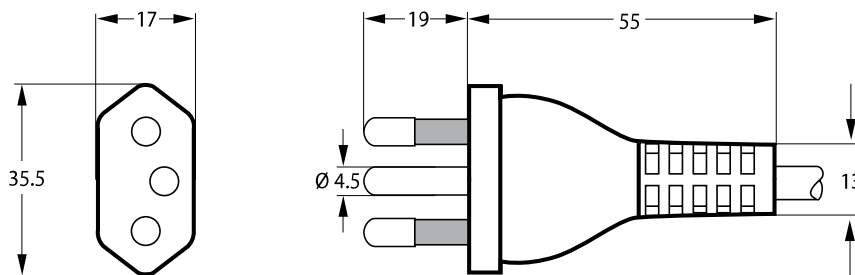

Approvals

Suitable flexible cord types

H03VV-F	3 G 0.75	H03V2V2-F	3 G 0.75
H05VV-F	3 G 0.75	H05VV-F	3 G 1
H05VV-F	3 G 1.5	H05V2V2-F	3 G 0.75
H05V2V2-F	3 G 1	H05V2V2-F	3 G 1.5
H03Z1Z1-F	3 G 0.5	H03Z1Z1-F	3 G 0.75
H05Z1Z1-F	3 G 0.75	H05Z1Z1-F	3 G 1
H05Z1Z1-F	3 G 1.5	H05RR-F	3 G 0.75
H05RR-F	3 G 1	H05RN-F	3 G 0.75
H05RN-F	3 G 1	H07RN-F	3 G 1
H07RN-F	3 G 1.5	H03RT-H	3 G 0.75
H03RT-H	3 G 1		

Following the standard for South Africa all cables approved according to IEC 60227 (PVC cables) and IEC 60245 (rubber cables) can be ordered for power cords. The plug 377 allows cables with a maximum outer diameter of 9.8 mm. Please note that the new South African standard does not allow to connect a 3-pole plug to a 2 core cable any longer.