

TYPE 283

Plug for safety class II

2-pole plug


KC 60884-1, KSC 8305

16 A, 250 V~

pins provided with insulating sleeves, nickel-plated



Technical drawing

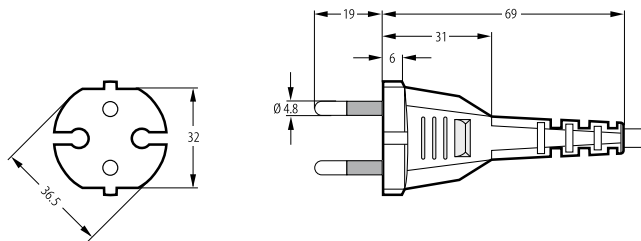

Approvals



Suitable flexible cord types

H03VV-F	2 x 0.75	H03VVH2-F	2 x 0.75
H03V2V2-F	2 x 0.5	H03V2V2-F	2 x 0.75
H03V2V2H2-F	2 x 0.75	H05VV-F	2 x 0.75
H05VV-F	2 x 1	H05VV-F	2 x 1.5
H05VVH2-F	2 x 0.75	H05VVH2-F	2 x 1
H05V2V2-F	2 x 0.75	H05V2V2-F	2 x 1
H05V2V2-F	2 x 1.5	H05V2V2H2-F	2 x 0.75
H05V2V2H2-F	2 x 1	H05RR-F	2 x 0.75
H05RR-F	2 x 1	H05RR-F	2 x 1.5
H05RN-F	2 x 0.75	H05RN-F	2 x 1