

BizLink


TYPE 330

Plug for safety class I

2-pole plug with dual earthing-contacts, splash-proof IP44
IEC 60884-1, SS XVII-CEE 7
16 A, 250 V~



Technical drawing

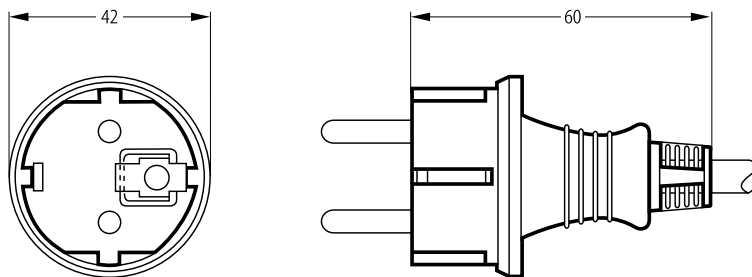

Approvals



Suitable flexible cord types

H03VV-F	3 G 0.75	H05VV-F	3 G 0.75
H05VV-F	3 G 1	H05VV-F	3 G 1.5
H05RR-F	3 G 0.75	H05RR-F	3 G 1
H05RR-F	3 G 1.5	H05RN-F	3 G 0.75
H05RN-F	3 G 1	H07RN-F	3 G 1
H07RN-F	3 G 1.5	H07RN8-F	3 G 1
H07RN8-F	3 G 1.5	H05BQ-F	3 G 1
H07BQ-F	3 G 1	H07BQ-F	3 G 1.5