

BizLink


TYPE 209

Plug for safety class II

2-pole flat plug (according to the new standard SANS 164-2:2012)
SANS 164-2:2012 Edition 3.1
16 A, 250 V~



Technical drawing

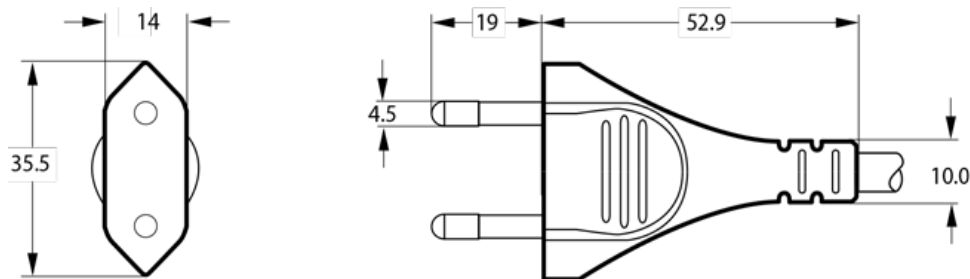

Approvals

Suitable flexible cord types

H03VVH2-F	2 x 0.5	H03VVH2-F	2 x 0.75
H05VVH2-F	2 x 0.75	H05VVH2-F	2 x 1
H03V2V2H2-F	2 x 0.75	H05V2V2H2-F	2 x 0.75
H05V2V2H2-F	2 x 1	H05VV-F	2 x 0.75
H05VV-F	2 x 1	H05V2V2-F	2 x 0.75
H05V2V2-F	2 x 1	H05RR-F	2 x 0.75
H05RR-F	2 x 1	H05RN-F	2 x 0.75
H05RN-F	2 x 1	H07RN-F	2 x 1

Following the standard for South Africa all cables approved according to IEC 60227 (PVC cables) and IEC 60245 (rubber cables) can be ordered for power cords; the plug 209 allows cables with a maximum outer diameter of 7.1 mm.