

BizLink

TYPE CW4014

Plug for safety class II

2-pole flat plug, available with double insulation


EN 50075, SS I

2.5 A, 250 V~

pins provided with insulating sleeves, nickel-plated, inclined



Technical drawing

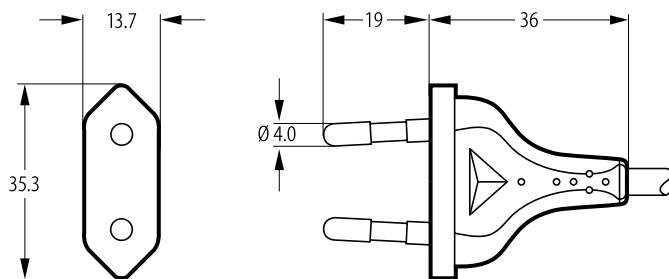

Approvals



Suitable flexible cord types

H03VVH2-F	2 x 0.5	H03VVH2-F	2 x 0.75
H03V2V2H2-F	2 x 0.75	H05VVH2-F	2 x 0.75
H05V2V2H2-F	2 x 0.75	H03Z1Z1H2-F	2 x 0.5
H03Z1Z1H2-F	2 x 0.75	H05Z1Z1H2-F	2 x 0.75

ENEC: Spain, UK, Portugal, Switzerland, Greece, Czech Republic, Italy, Sweden, Netherlands, France, Hungary, Norway, Ireland, Belgium, Finland, Slovenia, Luxembourg, Germany, Denmark, Austria