

BizLink

TYPE 320

Plug for safety class I

3-pole plug with/without earthing-contact, available with double insulation


AS/NZS 3112

7.5 A/10 A, 250 V~

pins provided with insulating sleeves, nickel-plated



Technical drawing

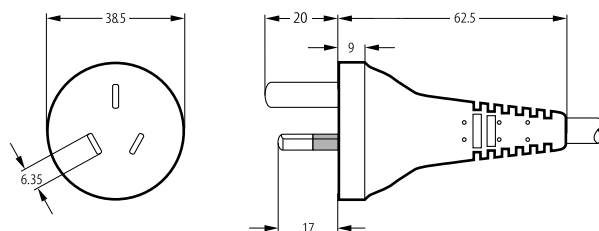

Approvals



Suitable flexible cord types

H05VV-F	2 x 0.75	H05VV-F	2 x 1
H05V2V2-F	2 x 0.75	H05V2V2-F	2 x 1
H05V2V2H2-F	2 x 0.75	H05V2V2H2-F	2 x 1
H05VV-F	3 G 0.75	H05VV-F	3 G 1
H03VV-F	3 G 0.75	H03V2V2-F	3 G 0.75
H05V2V2-F	3 G 0.75	H05V2V2-F	3 G 1
H05VVH2-F	2 x 0.75	H05VVH2-F	2 x 1
H05RN-F	2 x 0.75	H05RN-F	2 x 1
H05RN-F	3 G 0.75	H05RN-F	3 G 1
H05RR-F	2 x 0.75	H05RR-F	2 x 1
H05RR-F	3 G 0.75	H05RR-F	3 G 1
H03RT-H	3 G 0.75	H03RT-H	3 G 1