

BizLink

TYPE 325

Plug for safety class I

2-pole plug with earthing-contact, splash-proof IP44


DS 60884-2-D1

16 A, 250 V~

solid metal pins, nickel-plated



Technical drawing

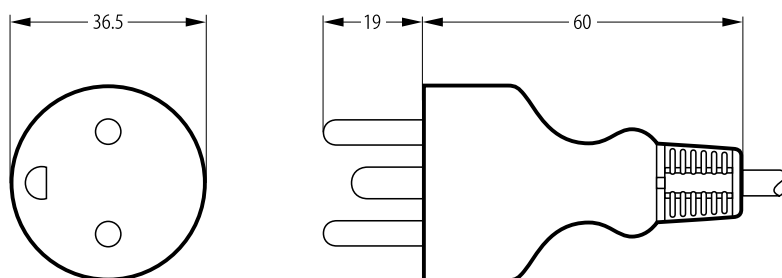

Approvals



Suitable flexible cord types

H03RT-F	3 G 0.75	H03RT-F	3 G 1
H05VV-F	3 G 0.75	H05VV-F	3 G 1
H05BB-F	3 G 1.5		