

**Branch Cable****DC Branch Cable 1500V/1000V**

1 to 2



1 to 3



2 to 3



3 to 3




- Consist of assembled, hermetically-sealed branch connection with choices of pre-assembled connectors terminating each PV cable ends
- Eliminate the associated high impedance from bad crimps and the need for in-field stripping and crimping



**Branch Cable**  
**DC Branch Cable 1500V/1000V**

**Dimensions**

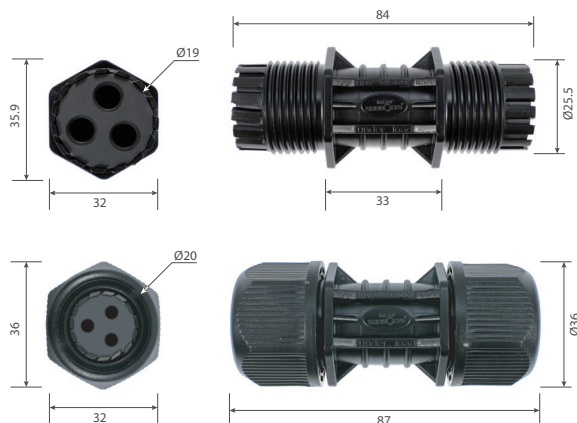


**Customization Services**

- Connectors
- Cable Length
- Cable Types
- Branch Trunks

Unit: mm

**Configuration Info**

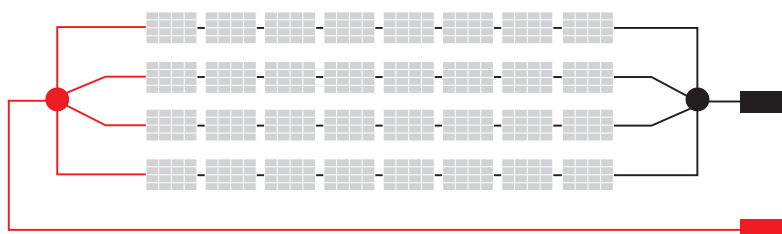

- Parallel multiple strings in one output
- Require shorter cable length with lower resistance
- Increase power efficiency in field

**Specifications**

Housing	PPO
Rated Voltage	1500V/1000V
Rated Current	TÜV 70A/UL 65A
Protection Degree	IP68 (mating with BizLink S418 connectors)
Temperature Range	TÜV -40°C ~ +90°C/UL -40°C ~ +85°C
Cable Size	2.5/4/6/10 mm <sup>2</sup> or 6/8/10/12/14 AWG
Connector Option	BizLink S418, MC4, MC4-EVO2, H4, or UTX



**Headquarters**

BizLink Technology, Inc.  
 47211 Bayside Parkway, Fremont, CA 94538, USA  
 Phone +1 510 252 0786 sales@bizlinktech.com

**Global Sales Contacts**

**USA** sales@bizlinktech.com  
**Europe** sales@bizlinktech.com  
**China** sales\_gc@bizlinktech.com  
**India** sales\_india@bizlinktech.com

**Japan** sales\_japan@bizlinktech.com  
**Malaysia** sales\_malaysia@bizlinktech.com  
**Taiwan** sales\_tw@bizlinktech.com