



Features


- 3.3V voltage supply.
- 8 Independent Full-Duplex Channels.
- Supports 8X28G NRZ and 8X56G PAM4 and 8X102G PAM4 electrical interface.
- Hot pluggable module.
- I2C interface & MSA compatible.
- Insertion loss less than 19.75dB at 26.56GHz.



Direct Attach Cable

800G QSFP-DD 2m

Dimensions

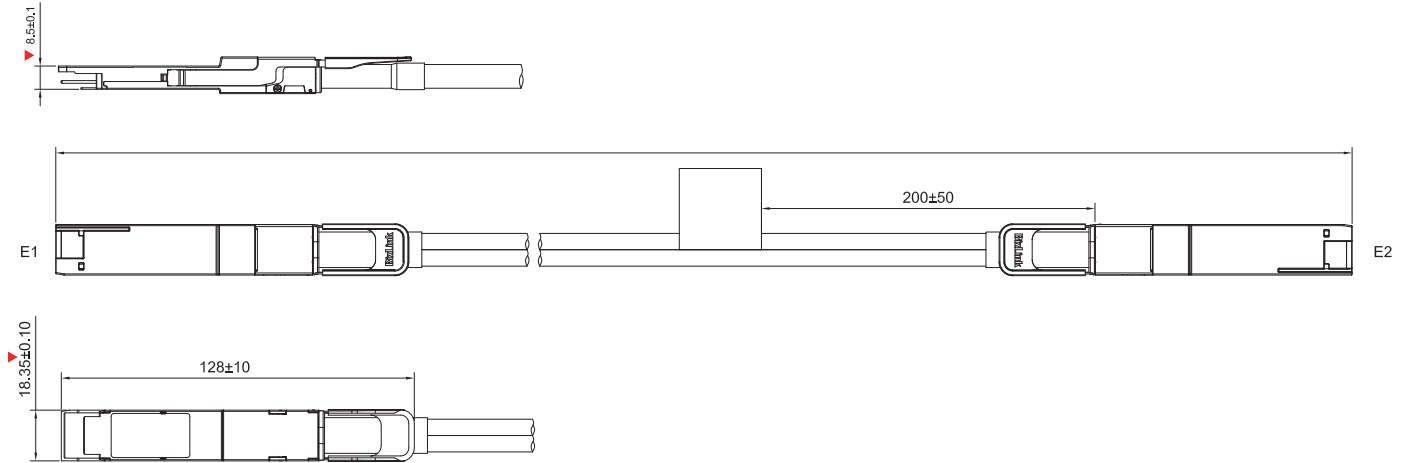

Specification

Parameters	Symbol	Min.	Typical	Max	Unit
Number of Lanes			8		Channels
Channel Data Rate			112		Gbps
Power Supply Voltage	VCC	3.135	3.3	3.465	V
Length (26Awg)			2		m
Length (30Awg)			1.5		m
Operating Temperature	TC	0	25	70	°C

Headquarters

BizLink Technology, Inc.

47211 Bayside Parkway, Fremont, CA 94538, USA
Phone +1 510 252 0786 sales@bizlinktech.com

Global Sales Contacts

USA sales@bizlinktech.com
Europe sales_europe@bizlinktech.com
China sales_gc@bizlinktech.com
India sales_india@bizlinktech.com

Japan sales_japan@bizlinktech.com
Malaysia sales_malaysia@bizlinktech.com
Taiwan sales_tw@bizlinktech.com