

BizLink

TYPE 735

Appliance connector for safety class I

2-pole with earthing-contact

IEC 60320-1, SS C 13, JIS C 8358, UL 817, K60320-1,

CSA C22.2 No. 21, AS/NZS 3109.1, GB 17465.1


10 A, 250 V~ (ENEC, CCC, SAA)

10 A/13 A, 125 V~ (UL/cUL)

7 A/12 A, 125 V~ (PSE)



Technical drawing

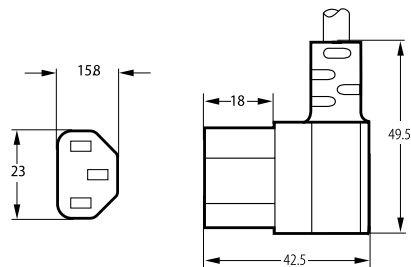

Approvals



Suitable flexible cord types

H05VV-F	3 G 0.75	H05VV-F	3 G 1
SVT	18/16AWG/3C	SJT	18/16AWG/3C
Japanese cord	3 x 0.75 mm ²	Japanese cord	3 x 1.25 mm ²
60227 IEC 53	3 x 0.75	60227 IEC 53	3 x 1
60227 IEC 53	3 x 1.5	60245 IEC 53	3 x 0.75
60245 IEC 53	3 x 1	60245 IEC 57	3 G 0.75
60245 IEC 57	3 x 1		

Europe: Spain, UK, Portugal, Switzerland, Greece, Czech Republic, Italy, Sweden, Netherlands, France, Hungary, Norway, Ireland, Belgium, Finland, Slovenia, Luxembourg, Germany, Denmark, Austria