

BizLink

TYPE 705

Appliance connector for safety class I

2-pole connector with earthing-contact


IEC 60320-1, SS C5, UL 817, CSA C22.2 No. 21, GB

17465.1, AS/NZS 60320.1

2.5 A, 250 V~ 7 A (cUL)



Technical drawing

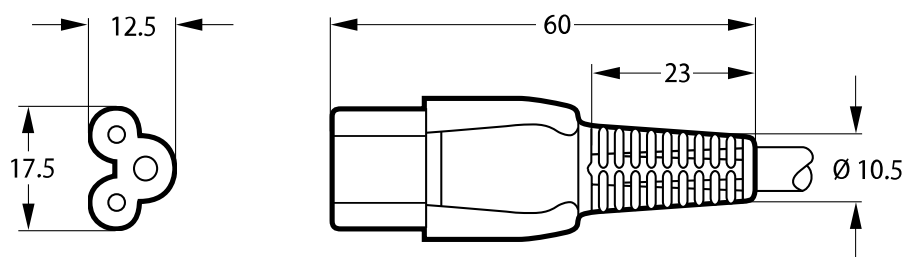

Approvals



Suitable flexible cord types

H03VV-F	3 G 0.75	H05VV-F	3 G 0.75
SVT	18AWG/3C	60227 IEC 52	3 x 0.75
60227 IEC 53	3 x 0.75	60227 IEC 53	3 x 1
H03Z1Z1-F	3 G 0.75	H05Z1Z1-F	3 G 0.75

Europe: Spain, UK, Portugal, Switzerland, Greece, Czech Republic, Italy, Sweden, Netherlands, France, Hungary, Norway, Ireland, Belgium, Finland, Slovenia, Luxembourg, Germany, Denmark, Austria