


BizLink

TYPE 395

Plug for safety class I
2-pole plug with earthing-contact
GB 2099.1, GB 1002
10 A, 250 V~
solid metal pins, nickel-plated



Technical drawing

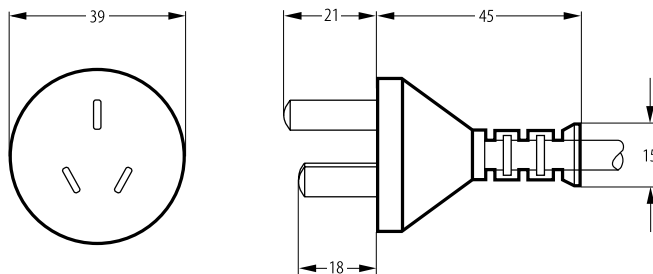

Approvals



Suitable flexible cord types

245 IEC 51	3 x 0.75	245 IEC 51	3 x 1
60227 IEC 52	3 x 0.5	60227 IEC 52	3 x 0.75
60227 IEC 53	3 x 0.75	60227 IEC 53	3 x 1
60227 IEC 57	3 x 0.75	60227 IEC 57	3 x 1
60227 IEC 56	3 x 0.75	60245 IEC 53	3 x 0.75
60245 IEC 53	3 x 1	60245 IEC 57	3 G 0.75
60245 IEC 57	3 x 1		